ZKTECO BIOMETRIC SECURITY SERIES

ZKTeco MB360

Face & Fingerprint Access Control Time Attendance Terminal

THIRD EYE TECH
Phone: 01321-119680
Web: www.thirdeyetechbd.com

PRODUCT OVERVIEW

The **ZKTeco MB360** is an innovative multi-biometric time attendance and access control terminal engineered with ZKTeco's advanced facial recognition and optical fingerprint technologies. Designed for modern offices, factories, educational institutions, and commercial facilities, it supports multiple verification methods—including face, fingerprint, RFID card, password, and multi-factor combinations.

With user verification completed in under 1 second, the MB360 eliminates entry bottlenecks while maintaining accurate attendance logs and door security. Flexible TCP/IP networking and USB-Host connectivity simplify integration with attendance management software.

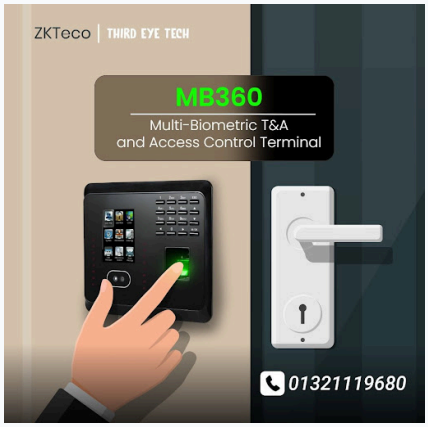

ZKTeco MB360 Multi-Biometric Terminal

KEY FEATURES

- **High-Capacity Multi-Biometric Storage:** Stores up to 1,500 facial templates, 2,000 fingerprints, 2,000 ID cards, and 100,000 transaction logs.
- **Rapid Sub-Second Verification:** Recognizes registered faces and fingerprints in ≤ 1 second for smooth workforce check-ins.
- **Integrated Door Access Control:** Dedicated relay interfaces for 3rd-party electric locks, exit buttons, and security alarms.
- **Flexible Network Connectivity:** Standard TCP/IP and USB-Host ports with optional Wi-Fi for effortless data synchronization.
- **Intuitive Color Interface:** 2.8-inch TFT color screen with multilingual menu support and tactile T9 keypad input.

TECHNICAL SPECIFICATIONS

PARAMETER	SPECIFICATION
Brand & Model	ZKTeco MB360 — Multi-Biometric Time Attendance & Access Control Terminal
Biometric & Log Capacity	1,500 Faces • 2,000 Fingerprints • 2,000 ID Cards (Optional) • 100,000 Records
Verification Speed	≤ 1 Second
Display	2.8-inch TFT Color Screen
Communication Interfaces	TCP/IP, USB-Host, Wi-Fi (Optional)
Access Control Interface	3rd-Party Electric Lock, Exit Button, Alarm

PARAMETER	SPECIFICATION
Standard Functions	SMS, DST, Scheduled-Bell, Self-Service Query, Automatic Status Switch, T9 Input, Photo ID, Camera, Multi-Verification, 12V Output, RS232 Printer (Optional Cable)
Optional Functions	ID / MF Cards, Work Code, ADMS
Power Supply	DC 12V 1.5A
Operating Environment	Temperature: 0°C – 45°C • Humidity: 20% – 80%
Dimensions & Net Weight	167.5 × 148.8 × 32.2 mm (L × W × T) • 380 g

Sales, Installation & Technical Support — Third Eye Tech: For pricing, bulk orders, and complete biometric access control setup, call **01321-119680** or visit **www.thirdeyetechbd.com**.